

Instructions:

Switch off the water heating system, shut off the mains supply, and open hot and cold taps at the lowest point in the building. Allow them to run until empty.

Unscrew the handle lever (6) from the handle (5) by hand

Using a 2.5mm A/F allen key loosen the revealed grub screw until the handle (5) is loose enough to remove.

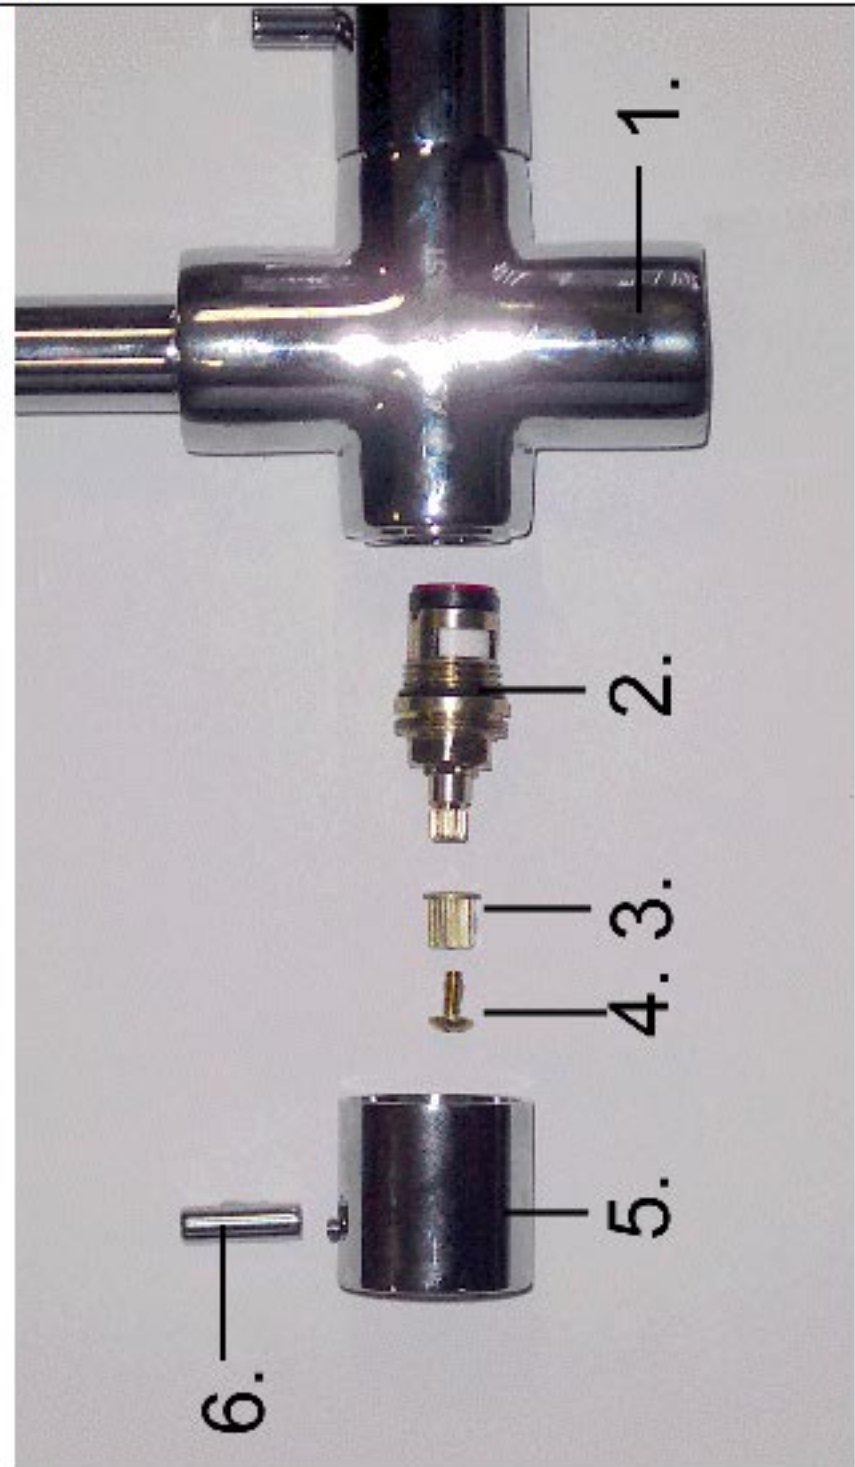
Unscrew and remove the brass fixing screw (4).

Pull off the Adaptor (3)

Firmly hold the tap body (1) and unscrew anticlockwise the valve cartridge (2) away from the tap body (1) using an adjustable spanner.

Replace any necessary parts and cover any rubber seals in Vaseline.

Reassemble the tap in the reverse order of disassembly. Ensure that the location pin on the circumference of the replacement valve locates in the corresponding recess within the tap body.

Diagram:**Diagram Key:**

1. Tap Body
2. Valve Cartridge
3. Adaptor
4. Securing Screw
5. Tap Handle
6. Handle Lever

Precautions:

Take care not to scratch any surfaces when using a screwdriver. Do not overtighten any threaded pieces. Ensure that the locating notch on the valve lines up with the valve handle.